

SALE PERIOD: February 1-28, 2018

ADI
GLOBAL DISTRIBUTION

February SAVINGS

2 WEEKS ONLY COVER DEALS! FEBRUARY 1-14, 2018!

2 WEEKS ONLY



VANCO
HDMI® Extender with PoE

- » Extends HDMI transmission up to 164 ft. (50m) from the HDMI source at full HD 1080p 24-bit color & 3D
- » Features auto EDID & EQ management for Plug & Play Installation

ZX-EVEX2006

2 WEEKS ONLY



TRENDNET
5- or 8-Port
10/100 Mbps Unmanaged
GREENnet Switch

- » Auto-negotiation optimizes networking speeds for all ports

TQ-TE100S5 (5-Port, 1 Gbps switching capacity)
TQ-TE100S8 (8-Port, 1.6 Gbps switching capacity)

2 WEEKS ONLY

FLIR
Multi-Format Megapixel Over Coax Technology
4- or 8-Channel Quad HD
MPX DVR with 2 or 3TB HDD
& (4 or 6) IR Dome Cameras

Bundles include:

- (1) 4- or 8-channel 4MP DVR, HD-CVI Technology, 2 or 3TB HDD, FLIR Cloud™ connectivity
- (4 or 6) 4MP outdoor IR dome cameras, 3.6mm lens, Digital Wide Dynamic Range, IR range to 80', IP66 rated



3D-M5104244
(4-CH, 2TB, 4 Cameras)

3D-M5108364
(8-CH, 3TB, 6 Cameras)

tc
Honeywell
THE POWER OF CONNECTED

Tuxedo Touch™
All-In-One Home Controller

- » Voice activated commands
- » Fully compatible with Honeywell Total Connect™ Remote Services
- » Local control of the system through any Wi-Fi® enabled device

TUXWIFIWP (White) • **TUXWIFISP** (Silver)

LYRIC™ T6 Pro
Wi-Fi® Thermostat

- » Adjust from anywhere with a smartphone or tablet
- » Works with Honeywell Total Connect™, Apple HomeKit and Amazon Alexa

QC-TH6220WF2

2 WEEKS ONLY

HIKVISION
Supports Power over Coax DVR System
2MP Outdoor IR Turret or Dome Camera

- » Day/Night
- » True Wide Dynamic Range
- » IR range to 131'; IP67 rated



HX-0D5D9AZE
» IK10 rated

HX-TR5D93E2 (Turret, 2.8mm lens)
HX-TR5D93E3 (Turret, 3.6mm lens)

HX-0D5D9AZE
(Dome, 2.8 - 12mm lens)

2 WEEKS ONLY




UltraTech
POWER PRODUCTS

12V 4.5 Ah, 7 Ah or 12 Ah
Sealed Lead Acid Batteries

- » Ideal for emergency situations
- » Rechargeable; Versatile usage

IM-1240 (4.5 Ah) **IM-1270** (7 Ah) **IM-12120** (12 Ah)

ALL MONTH LONG



ASSA ABLOY
9600 Series Surface
Mounted Electric Strike

- » Windstorm resistance rated
- » UL 1034 Burglary-Resistant Listed
- » Accommodates rim exit devices with 3/4" pullman latchbolts

HE-96630

2 WEEKS ONLY

Cat 5e or 6 Cable

- » Plenum rated
- » Meets all ANSI/TIA/EIA 568 C.2 standards

Cat 5e

- » 24 AWG/4-pair UTP tested to 350 MHz
- » 1,000' pull box

Cat 6

- » 23 AWG/4-pair UTP tested to 350 MHz
- » 1,000' reel

OE-CAT5PWH (White)
OE-CAT5PBL (Blue)

OE-CAT6PWH (White)
OE-CAT6PBL (Blue)

Honeywell
THE POWER OF CONNECTED

Cat 5e UTP General Purpose Cable

- » Unshielded twisted bare copper pairs
- » 24 AWG/4 pairs/CM/CL2 Listed; 1,000' pull box

WG-63301101 (White)
WG-63301106 (Blue)

MORE SAVINGS at ADIGLOBAL.COM/SAVE
CALL 1.800.233.6261



ADI PRICE ASSURANCE

We will meet any distributor's current promotional pricing! See back cover for details.





INTRUSION

Offer Your Customers

Honeywell

THE POWER OF CONNECTED

VISTA®-15P Hardwired Kit

- » Supports graphic keypads & Honeywell wireless products
- » Residential or small commercial use

Kit includes:

- (1) VISTA®-15P Control Panel
- (1) 6150 Fixed Alpha Keypad
- (1) CK-IS335 Motion Sensor
- (1) WAVE2 Siren & (1) Battery



V15PACKP
V15PSIAKSP (SIA)

Control Panels



Superior Security Plus Automation

M1 Control Kit with M1KP2 Keypad or Dual Path (IP/Cell) Communicator

EK-M1GSYS4S

- » Control & schedule: security/fire/access/energy/tasks
 - » Great integration flexibility with 50+ partner manufacturers
 - » Expansion capability 208 zones, up to 144 wireless
- EK-C1M1CDMA
- » Super-fast, full data communication to central station
 - » Free app supports eKeypad, M1TouchPro & IP partners
 - » No port forwarding. Allows remote programming of M1



EK-M1GSYS4S (Control Kit)



EK-C1M1CDMA (Communicator)

Honeywell

THE POWER OF CONNECTED

2-Way Audio Capable

720 or 1080p Wireless HD Indoor Video Camera

- » Supports Honeywell Total Connect®
 - » Motion detection & live look-in
 - » Compact portable design
- IPCAM-WIC1
- » Advanced night vision range
 - » Supports up to four detection zones
- IPCAM-WIC2



IPCAM-WIC1 (720p)

IPCAM-WIC2 (1080p)

Smart Home

Honeywell

THE POWER OF CONNECTED

117° Wide Angle View

1080p Wide Angle HD Outdoor Video Camera

- » 4 motion detection zones helps prevent false event triggering
- » Extended 65' night vision range so you're never left in the dark
- » Smart Wi-Fi® connectivity adapts to available customer bandwidth



IPCAM-WOC1

Wireless Transmitters & Receivers



DSC Compatible

Wireless Door/Window Sensor

- » Compact, low-profile contact
- » Includes white & brown covers
- » Replaceable 5-year lithium battery



CA-WST200

Honeywell

THE POWER OF CONNECTED

SiX™ Wireless Mini Door/Window Sensor

- » Easier installation - battery pull-tab enrollment & no-touch adjust to speed installation
- » Fewer truck rolls - remotely adjust sensor parameters & download software updates
- » Protect your accounts - Lyric® lock & SiX™ sensors protect your accounts from takeovers



SIXMINICT

Yale

Never Manage Keys Again!

Key Free Pushbutton Deadbolts

- » Full integration with security, energy management & lighting platforms
- » One touch Z-Wave® enrollment, 100 user codes



\$99.99 Each

2-PACK!

- 2Y-084384KT1 (Nickel)
- 2Y-084385KT1 (Bronze)
- 2Y-084386KT1 (Brass)



Provide Early Warning of Water Damage

Wireless Water Detector Transmitter

- » Alarms upon detection of 1/4" non-distilled water
- » Use with the Honeywell FP280 Flood Probe
- » Tamper if probe wire is cut or disconnected
- » Fully supervised, 60-minute check-in interval



IV-EN1751



4-Zone Add-On Receiver with Relay Outputs

- » Add up to (4) high performance EchoStream wireless transmitters to any installation
- » LED allows the user to view the current status of all four transmitters
- » (5) Form C relays for connecting to any panel: (4) alarm, (1) fault



IV-EN4204R



Arlo Pro Base Station with 2 or 4 Arlo Pro Cameras

Base Station

- » Provides long range connectivity
- » USB local storage backup

Camera

- » Wireless - no cords or wiring hassles
- » 2-way audio, weatherproof & rechargeable

AD-ARL02PKT (2 Cameras)

AD-ARL04PKT (4 Cameras)



100% Wire-Free & Weatherproof!

Arlo Go Mobile HD LTE Security Camera

- » 2-way audio featuring built-in mic & speakers
- » Long lasting rechargeable battery
- » Features integrated night vision & advanced motion detection



AD-VML40301T

Z-Wave® Diagnostics



One Service Call ROI

Z-Wave® Diagnostic Toolbox

- » Ensure robust networks before you leave
- » Easy to use, quickly solve most problems
- » Detailed workflows, guide troubleshooting



Z0-ZWPTBX

Environmental Sensors



Alerts to Wireless Alarm Panel

Wireless Waterbug

- » Detect leaks caused by water pipes, refrigeration units, freezers & more
- » Alerts for alarm, tamper, low battery & restore



WI-WBTX345 (345 MHz)
WI-WBTX319 (319 MHz)

the Best Security Options



INTRUSION

Wall Mount Motion Sensors



40' x 40' Pet Immune Dual Tech Detector

- » Anti-crosstalk technology
- » Patented quad zone logic
- » PIR & microwave technology



OP-MX40PI



Extremely Stable Detection Performance 50' x 50' Commercial Indoor PIR

- » Double conductive shielding
- » Patented quad zone logic
- » Temperature compensation feature



OP-CX502



Plug & Play Add-On to Any Security Panel

Wireless Dual Tech Motion Sensor

- » Endless coverage – driveways, entries, garage doors & more
- » Wirelessly transmit alarm signals to system
- » Battery & transmitter that matches your panel included



OP-FTNRRHW (Honeywell)
OP-FTNRRIX (Interlogix)

Outdoor Motion Sensors



Outdoor & Harsh Environment TriTech® Motion

Outdoor 50' x 50' TriTech® Detector

- » Superior catch performance
- » Flexible mounting height
- » UL Listed for outdoor motion detection



DS-OD850F1



Low-Profile 360° Ceiling Mount PIR

- » Up to 50' coverage
- » First to alarm & alarm memory control
- » AC or DC operating voltage



DS-DS937



Flexible Installation 360° Commercial Ceiling Mount PIR

- » 60' coverage up to 16' high
- » Selectable sensitivity
- » 5 year warranty



OP-SX360Z



60' TriTech® Ceiling Mount PIR

- » 360° x 60' panoramic coverage
- » Motion Analyzer II processing
- » Microwave adaptive processing
- » 8 - 18' mounting height



DS-DS9360

Batteries

MAXPOWERCELL, LLC

Lithium Batteries

- » 3 volt
- » UL Listed



7M-CR2025M (160 mAh)
7M-CR2032M (230 mAh)



7M-CR123A



2 Pack Universal Summary Data Communicator

- » Residential "Out-of-the-Box" operation
- » Supports virtually all security systems, panels, central stations & multiple receiver formats
- » Compatible with 2G/3G/4G cellular networks
- » No special programmer or central station equipment required



L3-4500KIT (GSM)
L3-CDMAEZKT (CDMA)

Communicators



TG-SCI Plus Dual Path Communicator

- » Combines broadband with Pay-On-Demand cellular
- » Operates on AT&T network
- » Residential alarm communicator



AD-TGSCIPG01



Sunset-Free Installations!

TG-1 Express LTE Communicator

- » Every panel, every time
- » Operates on AT&T & Verizon LTE networks
- » Residential alarm communicator



AD-TG1LAX01 (AT&T)
AD-TG1LX001 (Verizon)




AA and AAA Alkaline Batteries

- » 1.5V (LR6) AA
- » 1.5V (LR03) AAA
- » 12-pack



OE-AAA12PK (LR03)
OE-AA12PK (LR6)

Contacts




Rare Earth Door Channel Magnet

- » Closed gap: 0.75" (19mm)
- » Departure gap: 0.82" (21mm)
- » Maximum initial contact resistance: 0.150 ohm



OE-STLDRMAG



Level VI Efficiency 40VA Plug-in Transformer with Auto Resetting PTC Fuse

- » 16.5VAC, 40VA (40W)
- » LED power indicator
- » Auto-resetting PTC fuse
- » Screw terminal with ground



OE-PPS1640

Power



Lifetime Warranty Power Supply/Battery Charger

- » Selectable 6/12/24VDC operation
- » Auto resetting PTC overload protection
- » Output current: 1.2 A @ 6V, 1A @ 12V, .8A @ 24V



EK-P624

Security Cable



THE POWER OF CONNECTED

General Purpose Security 22/4 Stranded Cable

- » CM/CL2, Sunlight-Resistant Listed
- » 500' speedbag
- » Color: white



WG-11045801

WIRE & CABLE



FIRE

Large Selection of



Fire Alarm Control Panels

Easy to Install; Powerful Conventional System
5-Zone Fire Alarm Control Panel

- » Front panel or PC programmable
- » One person walk-test (audible or silent)
- » Class A & B IDC/ NAC circuits



ED-FX5R

ED-FX5RD (with Dialer)



Non-Proprietary Solution for Small to Mid-Sized Facilities

64-Point Intelligent Addressable Fire Alarm Control Panel

- » Remote diagnostics capable (know-before-you-go)
- » Retrofit friendly (use of existing wiring with SLC circuits up to 20K ft.)
- » Rotary addressed devices
- » Free 24/7 technical support



ED-FX64R

ED-FX64RD (with Dialer)

Voice Evacuation



Upgrade Fire Alarm Without Replacing Fire Alarm Control Panel

50W Voice Evacuation Control Panel with Mic

- » 2 voice messages & 4 field selectable alert tones
- » 4 supervised speaker outputs (Class A or B)
- » Includes integral supervised microphone



AN-VECP50



Single Action Manual Pull Station

- » Configured for indoor or outdoor use
- » Corrosion-resistant, gold plated SPST contacts
- » Key reset



WH-108400

Pull Stations



Explosion Proof & Ideal for Harsh Environments
Fire Alarm Pull Station

- » Dual action/key reset
- » Marine & NEMA type 4X rated
- » High quality rugged die-cast metal



AN-SGX32SK1

Protective Covers



Protects Pull Stations from Damage
Universal Stopper® Fire Labeling Cover

- » Indoor/outdoor, tough polycarbonate cover
- » High strength continuous hinge
- » UL/cUL, ADA



SF-STI13010F

SF-13210FR (Spacer)

SF-STI13020F (with Horn)

SF-13220FR (Spacer with Horn)



More Tests per Can, Lowest Cost per Test; For Use by Hand or with a Dispenser

smokecenturion™ Smoke Detector Tester

- » 2.6 oz. aerosol can
- » Silicon free, zero residue, eco-responsible - ozone friendly!
- » No CFCs
- » UL Listed
- » Manufacturer approved for use with SOLO809 kit



2S-M8

Testing Equipment



Most Efficient Way to Test Smoke Detectors

smokesabre™

- » 2.6 oz. can allows for most tests per can; Each can comes with attached sabre
- » Eco-friendly, no CFCs
- » Silicone free testing
- » UL Listed
- » Manufacturer Approved



2S-SABRE



Suited to Applications Requiring Remote Relay for Control or Status Feedback

Multi-Voltage Relay Module

- » Polarized coil input: DC control input only
- » UL864 Listed, CSFM Listed, MEA Accredited

0E-FRLY12V7

» Voltage Input: 12VDC, 24VDC

» Current Draw @ 12VDC, 24VDC 15mA

0E-FRLY24V10

» Voltage Input: 24VDC, 24VAC, 120VAC

» Current Draw @ 12VDC 15mA; @24VAC 50mA; 120VAC 30mA



0E-FRLY12V7
0E-FRLY24V10

Fire Relays



ASSA ABLOY

Mistake Proof Holders
Wall or Floor Mounted Door Holders

- » Low amperage draw
- » Aluminum finish

K7-980TRI689

- » Independently wound tri-volt coils



K7-980TRI689 (Floor Mounted)



K7-996TRI689 (Wall Mounted/Surface)
K7-998TRI689 (Wall Mounted/Semi-Recessed)





FIRE



Compatible with any UL Listed 12/24VDC 4-Wire Fire Alarm Panel

4-Wire Conventional Photoelectric Smoke Detector

- » Wide angle, dual red LED's
- » Form A relay output
- » Plug-in detector line/mounting base included
- » UL Listed S35851 fire alarm assembly



OE-COMSMOKE

Smoke | Heat | CO Detectors



Electrochemical Sensor

10 Year Sealed Battery CO Alarm

- » Slim low-profile design
- » Easy to distinguish from smoke alarms



BR-CO910B



No Battery Replacement for the Life of the Alarm

10 Year Sealed Battery Photo Smoke/CO Alarm

- » Photoelectric smoke sensor
- » Low-profile slim design



BR-PRC710B



No Battery Replacement for the Life of the Alarm

110V Combination Smoke/CO Alarm with 10 Year Locked Battery

- » Detects both smoke & carbon monoxide
- » 10 year life & warranty



BR-SC9120LBL



Install Interconnected Alarms in Minutes

10 Year AC/DC Wireless Smoke Alarm

- » Wire-free interconnection with other intelligent alarms
- » 10 year lithium battery backup
- » Sealed-in; tamper-resistant battery



3K-21027320



Speed Mount Design for Rapid Install

Commercial Carbon Monoxide Detector

- » Flush or surface mount options, snap-in wire harness
- » 10 year electrochemical sensor, functionality & gas testing capabilities
- » 9 - 32VDC, compatible with 12V security systems & 12 - 24V fire alarms



MA-CME1



Install Interconnected Alarms in Minutes

10 Year AC/DC Wireless CO/Smoke Combo

- » Wire-free interconnection with other intelligent alarms
- » 10 year lithium battery backup
- » Sealed-in; tamper-resistant battery



3K-21027323



One Module Integrates up to 12 Detectors to a Conventional Panel!

Buy (6) COSMO CO/Smoke Detectors, Get (1) FREE Interface Module!



BK-COSM02WKT (2-Wire)

BK-COSM04WKT (4-Wire)



Dry Contacts for Remote Monitoring of Surge Protection Status

54KA Series Connected AC Power Surge Protector

- » NEMA 4X enclosure, ideal for harsh environments
- » Protects 120V, 20A power on electrical circuits & control panels
- » UL1449 Listed, with UL1283 EMI/RFI filtering



DK-TSS4D

Surge Protection



Protects AC Power & Loop Circuits

Complete Fire Control Panel Protection

- » AC power protector & 5-position hardwired base
- » Installed in a NEMA 1 steel enclosure
- » Protect up to ten SLC, IDC/PIV, NAC dialer circuits

Contact your ADI representative for configuration assistance.



DK-TSS1

Fire Cable



THE POWER OF CONNECTED

General Purpose

14/2 Solid Fire Alarm Cable

- » FPL/CL2, Sunlight-Resistant Listed
- » 1000' reel
- » Color: red



WG-41131004



WIRE & CABLE



Rugged Design Resists Abrasion & Damage

18" Armored Door Cord

- » Metal end caps with mounting hardware included
- » Custom lengths available
- » White and brown end caps match all door frames



AC-DL2

ASSA ABLOY

Simple Economical Solution

Door Cord with Caps

- » Flexible armored stainless steel cable conduit with plastic end caps
- » Includes gray & black end caps - 18" length, 1/4" ID
- » MagnaCare® Lifetime Replacement No Fault Warranty



SN-TSBC

Exit Devices


ASSA ABLOY

Momentary, Narrow Rectangle Push Button

- » 3 amp rated contacts
- » Field convertible to DPST
- » MagnaCare® Lifetime Replacement No Fault Warranty



SN-PB3EN



Request-to-Exit Detector

- » Suitable for single or double doors
- » Adjustable 0 - 60 second relay latch time
- » Wall or ceiling mount up to 15', with vertically aimable lens (coverage pattern)

OE-RXD



OE-TP (Trim Plate)



Tamper-Resistant & Easy to Install

Exit Push Button

- » 20-gauge stainless steel faceplate
- » Hardware kit includes stainless steel tamper-proof screws & spanner bit



RU-908M032D



ASSA ABLOY

1-1/2" Green Mushroom Button

Pneumatic Time Delay Request-to-Exit Station

- » Labeled "PUSH TO EXIT" with adjustable time range of 2 - 60 seconds
- » Switch mounted single gang wall plate
- » Requires no external power



AC-TS14



For Use in Metal Doors

Electric Door Strike

- » Reversible for right-hand or left-hand doors
- » 12VDC operation, current draw 280mA @ 12VDC
- » Field programmable, fail safe/fail secure



SL-SD995C

Electric Strikes




Universal Door Strike

- » Includes 3 different faceplates, 12/24VDC operation
- » Field programmable fail safe/fail secure
- » Reversible for right-hand or left-hand doors



SL-SD996CNUQ

Magnetic Locks



600 lb. Holding Force Magnetic Lock

- » 12/24VDC
- » UL Listed
- » 2 year warranty



OE-MAG600



Insurance On Your Security

Door Prop Alarm Station

- » Keylock switch to reset/bypass
- » Output relay for remote monitoring
- » Adjustable 85 dB piezo siren



SZ-EA728V



Improve & Guarantee Security

Door Prop Alarm Station

- » Mortise cylinder reset/bypass switch
- » Adjustable siren/timed delay
- » Auto/Manual alarm reset



SZ-EA708V



Power Supply

ASSA ABLOY Dual-Voltage Switching Power Supply

- » Equipped with 8 individually relayed outlets
- » Up to 90% efficiency, meets UL 294 (6th Edition)
- » MagnaCare® Lifetime Replacement No Fault Warranty



SN-AQD68F8R



Reduces Installation Time & Need for Extra Brackets

Surface Minimag

- » For single outswinging interior doors
- » Up to 750 lbs. holding force
- » Field selectable voltage - 12/24VDC
- » No residual magnetism



RU-837128

Linear

Access Control Keypads

- IE-212I**
 - » 120 users
 - » Keypad programmable input trigger for request-to-exit or other open circuit contact
- IE-232I**
 - » 120 users; Door ajar, forced door, alarm shunt outputs
 - » Door position monitoring
- IE-2000E**
 - » 500 users; Indoor/Outdoor use
 - » Single-gang flush mount design



Keypads



Mullion-Style Outdoor Stand-Alone Back-Lit Keypad

- » 1,010 user codes, 2 - 6 digit code length, 2 relay outputs
- » 2 egress inputs, 1 door sensor input, optical tamper sensor
- » Output #2 can be programmed for use with a doorbell



SL-SK2323SPQ

IE-212I

IE-232I

IE-2000E

Savings You'll Love from ADI



ACCESS CONTROL

Honeywell

THE POWER OF CONNECTED

NetAXS-123

Access Control System

- » Ethernet virtual loop - flexible system options
- » 1-door plastic enclosure; Faster installations



NC-NX1P

Honeywell

THE POWER OF CONNECTED

Easy to Scale & Install

NetAXS-123 1-Door Standard Metal Enclosure or Add-On Boards

- » Embedded interface & MAXPRO® Cloud ready
- » 4A power supply & battery back-up included
- » IP-based for faster installs



NC-NX1MPS (Metal Enclosure)



NC-NXD1 (1-Door Add-On Board)



NC-NXD2 (2-Door Add-On Board)

Scalable Access Control Solutions

Honeywell

THE POWER OF CONNECTED

Everything You Need for a Quick Installation

3-Door All-In-One Kit

Kit includes:

- (1) NC-NX1MPS NetAXS-123 1-Door Standard Metal Enclosure
- (1) NC-NXD2 2-Door Add-On Board
- (3) NC-OP10HON OmniProx™ Mini-Mullion Wall Mount Readers



NC-NXOP10KIT

Honeywell

THE POWER OF CONNECTED

Manage Your Access Control Anywhere, Anytime

WIN-PAK® Software

- » Browser-based interface allows users to perform functions from virtually anywhere
- » Can be easily scaled from a single site up to a multi-region enterprise-level solution
- » Access control with web client



NC-WPX45 (Single User)

NC-WPS45 (Integration)

NC-WPP45 (Unlimited Users)

KEYSCAN

ACCESS CONTROL SYSTEMS

Interdata Group

Innovative IP

"At The Edge" Solution

Single Door PoE Control Unit

- » Reduces installation time, lengthy wiring runs & power requirements
- » PoE powers reader, strike & other auxiliary devices
- » Same capacity & capability as other Keyscan ACUs



CQ-CA150



2-Door Network Controller

- » 5 formats simultaneously, 3,000 off-line event buffer
- » Integrate access with alarms, elevator, CCTV/DVR & more
- » Supervised RS-485 & TCP/IP



6R-INTUC122S

Panels & Software

CDVI

Up to 500 Doors

Atrium 2-Door Star Kit

- » Can be used as a controller or an expander
- » Responsive web server
- » Pre-assembled universal power supply



CV-A22KITSTB

prodatakey

Cost-Effective 8-Door Access Control Kit Solution

Eight IO Cloud Access Control Kit

- » Full cloud management
- » Upgrade any wired system to cloud access
- » Networked or wimax wireless connectivity



JW-PM07BOKT (Wireless)
JW-PM07IOEKT (Networked)

Security Cable

Honeywell

THE POWER OF CONNECTED

Plenum Rated

22/4 Stranded Security & Control Cable

- » CMP/CL2P Listed
- » 1000' pull box
- » Color: natural



WG-31041112




WIRE & CABLE

HIKVISION

Metal Housing with Swivel Mount

Vandal-Proof IP Intercom Door Station

- » 1-unit indoor station access
- » Vandal & tamper resistant design
- » IP66, 12VDC & standard PoE



HX-KB8112IM

Intercom

HIKVISION

Touchscreen Door Control

Video Intercom Indoor Station

- » 7" touchscreen
- » 10/100 Mbps Ethernet, 8-channel alarm input, Wi-Fi®
- » Supports microSD card up to 32GB



HX-KH8300T



TALKAPHONE

IP Video Entry Call Station

IP Door Intercom

- » PTZ camera with 170° angle view
- » Hands-free communication



TF-VOIP201C3

Emergency Phone

TALKAPHONE

Access Pedestal - Card Reader

Via Series Access Pedestal

- » Call station included
- » Push plate & card reader options
- » Connects with AVM-1



TF-ACPM2C3

AIPHONE

Conveniently Identify Visitors

JO Series Door Station Box Sets

- » Improved picture quality
- » Simple daisy chain wiring
- » Elegant styling

JO Series

Video Expansion Station

- » Improved picture quality
- » 87° fixed camera
- » Hands-free or push-to-talk



AJ-JOS1A (Standard Set)

AJ-JOS1V (Vandal-Resist, Surface Mount)

AJ-JOS1F (Vandal-Resist, Flush Mount)

AJ-J01FD (Expansion Station)



TALKAPHONE

Fully Integrated

8- or 16-Station Area-of-Rescue Command Unit

- » Strobe/sounder indicates incoming call
- » LEDs indicate the calling location



TF-AOR8 (8-Station)

TF-AOR16 (16-Station)



COMMUNICATIONS

**960H Outdoor IR Analog Bullet or Dome Camera**

- » 800 TVL, 3.6 mm lens
- » True Day/Night
- » Digital Wide Dynamic Range
- » IR range to 49'
- » IP66 rated
- » 12V



OE-DRSTP800 (Dome, Grey)
OE-DRSTP800W (Dome, White)
OE-BLIR800F (Bullet, Grey)
OE-BLIR800FW (Bullet, White)



Supports TVI + 960H

1MP HD-TVI Outdoor IR Turret or Bullet Camera

- » True Day/Night
- » IR range to 65'
- » IP66 rated, 12V

OE-HDDF720P
» 2.8mm lens

OE-HDB720P
» 3.6mm lens
» Wide Dynamic Range



OE-HDDF720P (1.3MP Turret)
OE-HDB720P (1.3MP Bullet)

WHILE SUPPLIES LAST!

**AVYCON**

Supports Multiple Video Formats
2MP or 5MP HD-TVI Outdoor IR Eyeball Camera

- » HD-TVI, CVI, AHD & CVBS compatible
- » True Day/Night
- » IR range to 65'
- » IP66 rated
- » 12V



BX-ATL91F28W (2MP, 2.8mm lens)
BX-AETL91FTW (2MP, 3.6mm lens)

BX-AETA51FTW (5MP, 3.6mm lens)



Supports Multiple Video Formats
4MP WiseNet HD Indoor IR Dome or Outdoor IR Vandal Dome Camera

- » TVI, CVI, AHD & CVBS compatible
- » 2.8mm lens, Day/Night
- » Digital Wide Dynamic Range
- » Motion detection
- » IR range to 65'
- » 12V



SQ-HCD7010R (Indoor Dome)

SQ-HCV7010R

- » IP66 & IK10 rated

SQ-HCV7010R (Outdoor Vandal Dome)



Multi-Format MPX Technology
2.1MP MPX HD Outdoor IR Eyeball Dome Camera

- » AHD, CVI & TVI compatible
- » 2.8mm lens
- » True Day/Night
- » True Wide Dynamic Range
- » IR range to 82'
- » IP66 rated
- » 12V

FLIR MPX MULTI-FORMAT



3D-C243EW2

**HIKVISION**

Economical 1080p Video Imaging

2MP HD-TVI Outdoor IR Turret or Bullet Camera

- » 2.8mm lens
- » True Day/Night
- » Smart IR range to 65'
- » IP66 rated
- » 12V



HX-TR56D1TX2 (Turret)
HX-BL16D1TX2 (Bullet)

**Honeywell**

THE POWER OF CONNECTED

4MP Outdoor HQA HD-CVI IR Dome Camera


- » True Day/Night
- » True Wide Dynamic Range
- » Smart IR Range to 100'
- » IP66 rated
- » 12V



HD72HD4 (3.6mm lens)



HD274HD4 (2.7 - 12mm lens)



Compatible with TVI, AHD & Analog

4- or 8-Channel HD DVR with 1 or 2 TB HDD

- » Normal & event recording
- » Maximum 0.5MB per second @ 1080p resolution
- » 1080p stream: 1080p @ 12 fps
- » 720p stream: 720p @ 30 fps
- » Remote live view by mobile app



OE-HD4C1TD (4-CH, 1 TB)

OE-HD8C2TD (8-CH, 2 TB)

**DVRs****Honeywell**

THE POWER OF CONNECTED

Get High Definition Quality Over Coax
4- or 8-Channel HQA DVR

- » 15 fps @ 4MP/ 30 fps @ 1080p
- » Record all channels @ 4MP resolution
- » Simultaneous HDMI/VGA



HRHT4041 (4-CH, 1TB)

HRHT4084 (8-CH, 4TB)



Supports Multiple Video Formats
2.1MP AHD Outdoor IR Vandal Dome or Bullet Camera

- » AHD, HD-TVI, HD-CVI & 960H compatible
- » True Day/Night
- » Wide Dynamic Range
- » Star-Light™ Super Low Light
- » Smart IR range to 100'
- » IP66 rated, 12V
- » 5 year warranty



6K-V6263WTIR (Dome)

6K-B6263WTIR (Bullet)



Supports all HDoC Formats & Analog to 960H

4- or 16-Channel VMAX A1 DVR with 1 or 2TB HDD

- » H.264 video compression
- » Free pivot CMS & mobile apps; Event notifications



6K-VA0NE41T (4-CH, 1TB)

6K-VA0NE162T (16-CH, 2TB)


- 6K-VA0NE41T
» Up to 120 fps @ 1080p/ 80 fps @ 3MP
- 6K-VA0NE162T
» Up to 480 fps @ 1080p/ 320 fps @ 3MP



Compatible with HD-CVI, TVI & AHD

4-, 8- or 16-Channel Quad HD MPX Multi-Format DVR

- » 4MP - 15 fps, 3MP/1080p/ 720p - 30 fps
- » FLIR Cloud remote viewing
- » H.264+, SmartSearch motion
- » HD over Coax/UTP, BNC connection
- » HD 4MP @ 12 fps



3D-M51042 (4-CH, 2TB)

3D-M51083 (8-CH, 3TB)

3D-M51164 (16-CH, 4TB)





IP Intercom Indoor Station
with 7-inch Touch Screen
HX-KH8300T

1.3 MP IP Vandal-Proof
Intercom Door Station
HX-KD8112IM

Contact your Hikvision Sales representative to learn more about these cutting edge technologies.

LEADING TECHNOLOGIES AT GREAT PRICES



2 MP Indoor WDR
Dome Camera
HX-ID509AZE



16-Ch TurboHD 4.0
Tribrid DVR with 4 TB HDD
HX-T7216QP4

SEE IN COMPLETE DARKNESS




DarkFighterX PTZ
HX-N008225HW

- » 25x lens with rapid focus and 200m IR capabilities for 0 lux environments
- » Industry-leading color low light imaging down to 0.001 lux
- » Advanced and improved Smart Tracking
- » Supports H.265+ and Region of Interest Encoding

DarkFighterX Camera
COMING SOON!

- » Dual sensor design
- » One sensor for IR imaging that guarantees image brightness
- » Second sensor for visible light guarantees vivid color
- » Combines the two images into full color in extreme low lighting of 0.001 lux

HUMAN VISION BIONICS

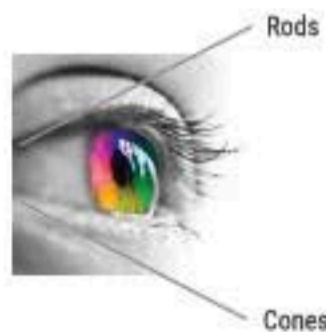

Rods

Collects brightness information

Cones

Collects color information

ONE LENS, DUAL SENSORS DESIGN



SENSOR 1 - Collects light

Collects IR light
Gets a black & white image

SENSOR 2 - Collects color

Collects visible light
Gets a vivid image

VALUE PLUS SOLUTIONS



2 MP Outdoor WDR Dome Camera

HX-OD2122F2 (2.8 mm)
HX-OD2122F4 (4 mm)

- » 2 MP (1920x1080) High Resolution, Dual Video Streams
- » 120 dB WDR
- » 3D Digital Noise Reduction
- » IP67 and IK10 Rating
- » 100 ft. IR Range



2 MP WDR Mini Bullet Camera

HX-BL2022F4 (4 mm)

- » 2 MP (1920 x1080) High Resolution, Dual Video Streams
- » 120 dB WDR, BLC
- » True Day/Night
- » IP67 Rating
- » 100 ft. IR Range



4 MP Outdoor WDR Dome Camera

HX-OD2142F2 (2.8 mm)
HX-OD2142F4 (4 mm)

- » 4 MP (2688x1520) High Resolution, Dual Video Streams
- » 120 dB WDR
- » 3D Digital Noise Reduction
- » IP67 and IK10 Rating
- » 100 ft. IR Range



4 MP WDR Mini Bullet Camera

HX-BL2042F4 (4 mm)

- » 4 MP (2688x1520) High Resolution, Dual Video Streams
- » 120 dB WDR, BLC
- » True Day/Night
- » IP67 Rating
- » 100 ft. IR Range

TURBOHD™ SOLUTIONS

Introducing Power over Coax

- » Use existing coaxial or UTP cabling
- » PoC supports 2 and 5MP high-definition video
- » Supports DVRs with Power over Coax (PoC) capability for "DVR-powered cameras"



2 MP Outdoor IR Bullet Camera

HX-BL1D93E2 (2.8 mm)
HX-BL1D93E3 (3.6 mm)

- » TurboHD 4.0
- » Supports PoC DVR System
- » True Day/Night
- » True WDR
- » 12 VDC/PoC
- » IP67 Rating



2 MP Indoor WDR Dome Camera

HX-ID509AZE

- » TurboHD 4.0
- » Supports PoC DVR System
- » 2.8-12 mm Motorized Lens
- » True Day/Night
- » True WDR
- » 12 VDC/24 VAC/PoC
- » IP67 Rating



2 MP Outdoor WDR Bullet Camera

HX-BL1D9A3ZE

- » TurboHD 4.0
- » Supports PoC DVR System
- » 2.8-12 mm Motorized Lens
- » True Day/Night
- » True WDR
- » 12 VDC/24 VAC/PoC
- » IP67 Rating

8-Channel TurboHD 4.0 Tribrid DVR with 2 TB Hard Drive

HX-T7208QP2

- » H.265/H.265+ Video Compression
- » Up to 2 MP camera resolution
- » HD-TVI/Analog/IP Camera Triple Hybrid
- » Up to 12 TB storage capable
- » HDMI and VGA output
- » Power over Coax capable

16-Channel TurboHD 4.0 Tribrid DVR with 4 TB Hard Drive

HX-T7216QP4

- » H.265/H.265+ Video Compression
- » Up to 2 MP camera resolution
- » HD-TVI/Analog/IP Camera Triple Hybrid
- » Up to 12 TB storage capable
- » HDMI and VGA output
- » Power over Coax capable



*Laptop not for sale



3 MP Vandal-Proof Outdoor
Mini PTZ Dome Camera
HX-NOD3304E



4 MP WDR Mini Bullet Camera
HX-BL2042F4

Contact your Hikvision Sales representative to learn more about these cutting edge technologies.



2 MP Outdoor WDR Varifocal Bullet Camera

HX-BL2622VZ

- » 2.8-12mm Motorized Lens
- » 2 MP High Resolution, Full 1080p Video
- » 120 dB WDR
- » 100 ft. IR Range
- » IP67 Rating
- » PoE/12VDC
- » Audio and Alarm I/O
- » Edge Storage Micro SD Slot, 128 GB



2 MP Vandal-Proof IR Outdoor Dome Camera

HX-OD2722VZ

- » 2.8-12mm Motorized Lens
- » H.264+ Compression
- » 120 dB WDR
- » IP67 and IK10 Rating
- » 100 ft. IR Range
- » Audio and Alarm I/O
- » PoE 802.3af
- » Edge Storage MicroSD Slot, 128 GB



4 MP Outdoor WDR Varifocal Bullet Camera

HX-BL2642VZ

- » 2.8-12mm Motorized Lens
- » 4 MP High Resolution, Full 1080p Video
- » 120 dB WDR
- » 100 ft. IR Range
- » IP67 Rating
- » PoE/12VDC
- » Audio and Alarm I/O
- » Edge Storage Micro SD Slot, 128 GB



4 MP Vandal-Proof IR Outdoor Dome Camera

HX-OD2742VZ

- » 2.8-12mm Motorized Lens
- » H.264+ Compression
- » 120 dB WDR
- » IP67 and IK10 Rating
- » 100 ft. IR Range
- » Audio and Alarm I/O
- » PoE 802.3af
- » Edge Storage MicroSD Slot, 128 GB

DEEP LEARNING TECHNOLOGY



DeepinMind NVR

HX-N9632X16S

Capable of detecting and recording subjects identified as human objects. It eliminates false detections of irrelevant movement in the surroundings and animals or other non-human objects.



3 MP Vandal-Proof Outdoor Mini PTZ Dome Camera

HX-NOD3304E

- » 1/2.8" Progressive Scan CMOS
- » H.264 compression
- » 4x Optical Zoom
- » DWDR
- » IP67 and IK10 Rating
- » PoE(802.3af)
- » Supports RS485 and Plug & Play



8-Channel Plug & Play NVR with 2 TB Hard Drive

HX-N7608IP2T

- » Supports H.264, H.264+, H265 and H265+
- » Up to 12MP recording resolution
- » HDMI video output up to 4K (3840x2160)
- » Integrated 8-Port (or 16-Port) PoE Switch
- » Includes 2TB HDD, up to 12TB capacity
- » 2 SATA Interface



16-Channel Plug & Play NVR with 2 TB Hard Drive

HX-N7616IP2T

- » Supports H.264, H.264+, H265 and H265+
- » Up to 12MP recording resolution
- » HDMI video output up to 4K (3840x2160)
- » Integrated 8-Port (or 16-Port) PoE Switch
- » Includes 2TB HDD, up to 12TB capacity
- » 2 SATA Interface

ENHANCED DETECTION FOR VIDEO CONTENT ANALYSIS



1.3 MP IP Vandal-Proof Intercom Door Station

HX-KB8112IM

- » Metal Housing with Swivel Mount
- » 1-Unit Indoor station access
- » Vandal and Tamper Resistant Design
- » Power-over-Ethernet (IEEE 802.3af Standard PoE)
- » IK9 and IP66
- » 12 VDC and Standard PoE



IP Intercom Indoor Station with 7-inch Touch Screen

HX-KH8300T

- » 10/100Mbps Ethernet
- » 8-ch Alarm Input Sensors
- » FTF Color LCD with 1024 x 600 Resolution
- » Remotely answer video door phone via Hik-Connect
- » High-Performance SOC Processor
- » MicroSD Card Support

VALUE SOLUTIONS

VIDEO INTERCOM
SOLUTIONS

Contact your ADI representative for these great offers. Valid February 1, 2018 to February 28, 2018

hikvision.com

HIKVISION

hikvision.com

HIKVISION

Surveillance Solution with ADI



VIDEO SURVEILLANCE



5 Year Warranty

2.1MP Outdoor IR Bullet Camera

- » 4 mm lens, True Day/Night
- » True Wide Dynamic Range
- » 3D Digital Noise Reduction
- » IR range to 100'
- » IP67 rated
- » 12V/PoE



0E-21BF40WDR

WHILE
SUPPLIES LAST!

IP Cameras

speco technologies

5 Year Warranty

3MP Outdoor IR Vandal Dome or Bullet Camera

- » 2.8mm lens, True Day/Night
- » Supports 3MP @ 20 fps & 1080p @ 30 fps
- » Digital Wide Dynamic Range
- » 3D Digital Noise Reduction
- » IR range to 98'
- » IP67 rated, 12V/PoE

SO-03VLD1
» IK10 rated



SO-03VLD1 (Vandal Dome)
SO-03VLB3 (Bullet)



Exceptional Resolution & Detail

4MP Outdoor IR Bullet or Eyeball Camera

- » 2.8mm lens, True Day/Night
- » True Wide Dynamic Range
- » 3D Digital Noise Reduction
- » IP66 rated, 12V/PoE
- 3D-P143B4
- » IR range to 90'
- 3D-P143E4
- » IR range to 82'



3D-P143B4 (4MP Bullet)
3D-P143E4 (4MP Eyeball)



THE POWER OF CONNECTED

2MP Outdoor IR Ball or Bullet Camera

- » True Day/Night
- » Wide Dynamic Range
- » 3D Digital Noise Reduction
- » IP66 rated, 12V/PoE

HEW2PR1

- » 3.6mm lens
- » IR range to 165'

HBW2PR2

- » 2.7 - 12mm motorized lens
- » IR range to 200'



HEW2PR1 (Ball)



HBW2PR2 (Bullet)



4MP Outdoor IR Turret or Vandal Dome Camera

- » True Day Night
- » Digital Wide Dynamic Range
- » 3D Digital Noise Reduction
- » IP66 & IK10 rated
- » 12V/PoE

BX-AEHN41F28

& BX-VHN41AVLT

» IR range to 100'

BX-AVCVHN41F

» IR range to 65'



BX-AEHN41F28 (Turret, 2.8mm lens)
BX-AVCVHN41F (Dome, 3.6mm lens)



BX-VHN41AVLT
(Dome, 3.3 - 12mm lens)



2 or 4MP Outdoor IR Turret Camera

- » 2.8mm lens, True Day/Night
- » True Wide Dynamic Range
- » IR range to 98'
- » IP67 rated
- » 12V/PoE



KA-TVT5301 (2MP, Grey)
KA-TVT5302 (2MP, White)



KA-TVT5304 (4MP, Grey)



Multiple Network Monitoring

2 or 4MP Outdoor IR Vandal Dome Camera

- » Day/Night, True Wide Dynamic Range
- » 3D Digital Noise Reduction
- » IR range to 98'
- » IP67 & IK10 rated
- » 12V/PoE

VD-N24BL52


» 2.8mm lens

VD-N42AM3Z

» 2.7 - 12mm lens



VD-N24BL52 (2MP)

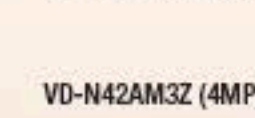

VD-N42AM3Z (4MP)



Clear Images
Day & Night

2MP Outdoor IR Turret Camera

- » True Day/Night
- » True Wide Dynamic Range
- » Smart IR range up to 100'
- » IP67 rated; 12V/PoE

HX-TR2322F2 (2.8mm lens)
HX-TR2322F4 (4mm lens)



speco technologies

2MP Mini PTZ Camera with Junction Box

- » 4x optical zoom
- » 2.7 - 11mm motorized lens
- » Day/Night, True Wide Dynamic Range
- » 3D Digital Noise Reduction
- » IP66 & IK10 rated
- » UL Listed



SO-02P4X




3MP Indoor Fisheye or 5MP Outdoor IR Vandal Dome Camera

- » Day/Night; Wide Dynamic Range
- » IK10 rated; Sony STARVIS sensor
- GU-FE3402
- » 4 viewing mode for live & playback
- » Built-in video analytics
- GU-EVD5100
- » 3 - 9mm lens
- » IR range to 98'
- » IP67 rated
- » Super low lux



GU-FE3402 (Fisheye)



GU-EVD5100 (Dome)



4K Resolution & H.265 Support 8MP Outdoor IR Vandal Dome or Bullet Camera

- » Day/Night; Digital Wide Dynamic Range
- » 3D Noise Reduction
- » Advanced H.265 & Super H.264™ compression technology
- » Tamper detection, Edge Storage (up to 128GB)
- » IR range to 100'
- » IP66 rated
- » 12V/PoE
- 3D-N253V8
- » IK10 rated

3D-N253V8 (Dome, 2.8mm lens)
3D-N253B8 (Bullet, 4mm lens)



Quad HD Superior Detail & H.265 Compression 4MP Outdoor IR PTZ Dome Camera

- » Ultra Wide Dynamic Range
- » 360° continuous pan, tilt -15° ~ 90°
- » 12x optical/16x digital zoom
- » IR range to 330'
- » IP66 rated



3D-N346ZW124



2MP Indoor Wireless Vandal Dome Camera

- » 2.8mm lens, Day/Night
- » Vandal & dust resistant
- » SD card included
- » IP42 & IK08 rated
- » 4.8 - 5.2V/PoE, 3 year warranty



24-0895004

2MP Indoor Wireless Cube Camera

- » 2.8mm lens, Day/Night
- » Built-in IR illumination up to 32'
- » SD card included
- » 4.8 - 5.2V/PoE
- » 3 year warranty



24-0892004



Excellent Low Light Performance

1.3 or 2MP Starlight Dome Camera

- » 3 - 9mm auto-iris varifocal lens
- » True Day/Night
- » True Wide Dynamic Range
- » Intelligent Dynamic Range
- » IK10 & IP66 rated; 12V/PoE
- PB-NIN013A3S (720p resolution)
- PB-NIN023A3S (1080p resolution)





Great Performance - Maximum Value

VIDEO SURVEILLANCE



4-, 8- or 16-Channel NVR with 1 or 2TB HDD

- » HDMI/VGA output 1920 x 1080
- » H.264/MPEG-4 video stream input
- » Remote live view by mobile app
- » 5 year warranty
- » Free DDNS support



0E-41TP1UN (4-CH, 4 PoE, 1TB)

0E-82TP1UN (8-CH, 8 PoE, 2TB)

0E-162TP15UN (16-CH, 16 PoE, 2TB)

WHILE SUPPLIES LAST!

NVRs



4K Recording up to 30 fps/Ch


4- or 8-Channel 4K PoE NVR

- » Up to 4K (8MP) recording
- » H.265/H.264 dual streaming
- » 4 or 8 PoE ports



3D-DNR2141 (4-CH, 4 PoE, 1 TB)

3D-DNR2182 (8-CH, 8 PoE, 2 TB)



Setup & Camera Configuration in Under 3 Minutes!

9-Channel, 4 PoE VMAX IP Plus NVR with 2TB HDD

- » Up to 5MP @ 30 fps
- » Free mobile apps & Pivot Pro CMS
- » 5 year limited warranty



6K-VP92T4P



4K Quad HD Recording with Outstanding Detail

8-Channel 4K PoE NVR with 3TB HDD & (2) 8MP 4K Outdoor IR Vandal Dome & (4) 4MP Outdoor IR Eyeball Cameras

Bundle includes:

- (1) 8-channel 4K NVR with 8 ports of PoE, H.265, 3TB HDD, FLIR Cloud™ connectivity
- (2) 8MP 4K outdoor IR vandal dome cameras, 2.8mm lens, Day/Night, True Wide Dynamic Range, IR range to 100', IP66 & IK10 rated
- (4) 4MP outdoor IR eyeball cameras, 2.8mm lens, Day/Night, True Wide Dynamic Range, IR range to 82', IP66 rated



3D-N8A32K44



IP Bundles



4K Quad HD Recording with Outstanding Detail 16-Channel 4K NVR with 4TB HDD, (4) 8MP 4K Outdoor IR Vandal Dome & (8) 4MP Outdoor IR Eyeball Cameras

Bundle includes:

- (1) 16-Channel 4K NVR with 16 ports of PoE, FLIR Cloud™ connectivity, H.265, 4TB HDD
- (4) 8MP 4K outdoor IR vandal dome cameras, 2.8mm lens, Day/Night, True Wide Dynamic Range, IR range to 100', IP66 & IK10 rated
- (8) 4MP outdoor IR eyeball cameras, 2.8mm lens, Day/Night, True Wide Dynamic Range, IR range to 82', IP66 rated



3D-N16D44K84



Storage



3 Year Limited Warranty Skyhawk 8TB Hard Drive

- » ImagePerfect™ firmware enables uninterrupted frame & seamless streaming
- » Supports up to 64 cameras & 3x the workload of a desktop-class drive
- » NVR & DVR ready drives deliver robust drive design for multi-drive environments



G8-ST8000VXA



Megapixel over Coax Technology

4-Channel HD-CVI DVR with 1TB HDD & (4) 2.1MP Outdoor IR Turret Cameras

Bundle includes:

- (1) 4-channel HD-CVI DVR, 1080p @ 25/30 fps, 1TB HDD
- (4) 2.1MP IR turret cameras, 2.8mm lens, Day/Night, IR range to 164', IP67, 12V



VJ-EV14KT42B

HD over Coax Bundles



Multi-Format Megapixel over Coax Technology 16-Channel Quad HD MPX DVR with 4TB HDD & (12) 4MP IR Dome Cameras

Bundle includes:

- (1) 16-channel 4MP DVR, 4TB HDD, FLIR Cloud™ connectivity
- (12) 4MP outdoor IR dome cameras, 3.6mm lens, IR range to 80', IP66 rated



3D-M51164124



Monitors

24" or 27" LED HD Surveillance Monitor

- » 1080p
- » BNC, VGA, HDMI inputs (includes cables)
- » 24/7/365 UL rated operating capability



0E-24LED

0E-27LED



WIRE & CABLE

Coax Cable




THE POWER OF CONNECTED

All Bare Copper Center & Power Conductors RG59/U + 18/2 Siamese CCTV Coax Cable

- » 95 copper clad aluminum braid shield
- » General purpose rated: CCTV/CM/CL2 Listed
- » 500' reel-in-a-box



WG-65086101 (White)
WG-65086108 (Black)



Compatible with AHD, CVI & TVI Cameras

HD Pair Push Terminal BNC or Pigtail Video Balun

- » Full motion video over UTP, Cat 5/5e/6/6a
- » Standard resolution up to 2,000 ft. (600m)
- » No power required

0E-VBPUSHTHD

» Push terminal to BNC

0E-VBPUSHPHD

» Push terminal to pigtail BNC



Accessories



Allows Local Viewing of IP Camera Images

PINPOINT IP Camera Installation

- » Uses PoE from the network – No local power is required
- » Enables rapid & precise adjustment of lens focus & viewing angle



FV-VADPPW

0E-VBPUSHTHD

0E-VBPUSHPHD

High Performance Networking Solutions



NETWORKING

D-Link
FOR BUSINESS

All-in-One Gigabit Switch & PoE Extender 5-Port Gigabit Smart Managed PoE-Powered Gigabit Switch

- » 5x Gigabit ports
- » Powered by PoE
- » Lifetime warranty



8E-DGS11005P

Switches

D-Link
FOR BUSINESS

8-Port Gigabit Smart PoE Switch

- » All 8 ports are PoE & Gigabit
- » Power input: 100 to 240VAC, 50 to 60 Hz
- » PoE power budget: 64 watts
- » Limited lifetime warranty
- » UL Listed



8E-GS110008P

VIGITRON

5-Port PoE L2 Network Switch

- » 37 watt PoE budget per port
- » Automatic PoE port priority allocation
- » Full layer 2 network switch functionality



VG-VI3005

TRENDNET

16-Port Gigabit PoE+ Switch

- » 16x Gigabit PoE+ ports; 246 W PoE budget
- » 32 Gbps switching capacity; Sturdy metal switch
- » Rack mount brackets included
- » Limited lifetime warranty



TQ-TPETG160G

VIGITRON

High PoE, Port Monitoring Auto Reconnect

10-Port Layer 2+ PoE Switch

- » Up to 30 watts for 6 ports
- » High bandwidth for large MP cameras
- » Port monitoring with connected device status



VG-VI3010

Power Distribution

LUXUL

Simple Remote Reboot of Powered Devices

Intelligent Network Power Distribution Unit

- » Control startup/shutdown with remote sequencing
- » MOV surge & spike protection
- » Seamless integration with Domotz, and other third-party control systems

LW-PDU02

LW-PDU02
» Individual IP control of 2 outlets (2 total)

LW-PDU08
» Individual IP control of 8 outlets (9 total)

LW-PDU16
» Individual IP control of 8 outlets (16 total)



LW-PDU08



LW-PDU16

Altronix

PoE/PoE+ Repeater

- » Extends data 100m
- » IEEE 802.3af & 802.3at compliant



AX-NETXTX

PoE Devices

LAN-POWER

Cost-Effective Data Extender

Ethernet Extender

- » Extend Ethernet data 328 ft./100m & PoE
- » Up to 10 units in a single channel
- » Powered by incoming PoE or external PSU LP-2340PSU



LP-2340

Altronix

Supports PoE/PoE+ Cameras/Devices

16-Port Managed Midspan Injector

- » Provides up to 30W per port (300W maximum)
- » Management facilitates remote camera reset & real-time status monitoring



AX-NET16M

AVYCON

Long Range Transmission up to 6 Miles

Wi-Fi® CPE Network Bridge

- » Utilizes the 5.8 GHz Wi-Fi® frequency
- » Supports up to 300Mbps
- » Supports bridge, access point, router & repeater operations
- » Includes 48V PoE power injector
- » Outdoor rated



BX-ANCP3005Q

Wireless

TRENDNET

Domotz Pro

- » Remote network & device monitoring
- » Automated network mapping
- » Remote power management
- » SNMP monitoring



TQ-TEWD100

Cat 6a Cable

Honeywell

THE POWER OF CONNECTED

Riser Network & IP

23/4-Pair Category 6a UTP Cable

- » CMR/CL2R
- » Sunlight-Resistant Listed
- » 1000' reel



WG-51931001 (White)
WG-51931006 (Blue)

WIRE & CABLE



AUDIO/VIDEO

ADI is the Source for

NUVO

Control Nuvo® Player & More!

7" Android PoE On-Wall Touch Screen

- » PoE, fully functional Android™ tablet
- » Runs the Player Portfolio app for seamless control of your home audio



XW-NVP30BK (Touch Screen)

P3100 Professional Series Player

- » 3 zones, 40 watts per zone
- » Connect any storage device to USB port & play through NuVo® system



XW-NVP3100NA

Whole House Audio

YAMAHA

Access to Your Music Library, Pandora®, Spotify, Rhapsody® & more

Wireless Streaming Amplifier

- » Connect a pair of your favorite speakers to this stereo amp, then use your existing Wi-Fi® network to access all of your music from a simple app



YM-WXA50DS

Russound

6 Zones of Audio with App Control

Advanced 6-Source/6-Zone Controller

- » (6) source inputs
- » Bluetooth® option
- » Fixed or variable outputs for zones 1 & 2



RD-MCA66



Under 4" Depth, Square + Round Grills

6.5" In-Wall/In-Ceiling Speaker (Each)

- » Sonic Vortex® technology
- » 6.5" fluted injected poly woofer
- » 1" aluminum dome tweeter



DX-ICW6MB



Broader Sound, Deeper Bass

6.5" In-Ceiling Speaker (Each)

- » Sonic Vortex® technology
- » 6.5" fluted injected poly woofer
- » 1" aluminum dome tweeter



DX-IC6MB

Architectural Speakers

PROFICIENT

Small Sound Never Sounded So Sweet

6.5" Thin-Bezel Ceiling LCR Speaker (Each)

- » 6-1/2" graphite woofers
- » 1" pivoting aluminum dome tweeters
- » 125W power handling



C1-C661



Small Footprint, Huge Bass

6.5" or 8" In-Ceiling Subwoofer

- » Sonic Vortex® technology
- » Kevlar® woofer



DX-ICS6MB (6.5")

DX-ICS8MB (8")

PROFICIENT

Kick Up the Highs & Lows

6.5" Thin Bezel Ceiling Speakers (Pair)

- » 6-1/2" graphite woofers
- » 1" pivoting aluminum dome tweeters
- » 125W power handling



C1-C641

AudioSource

Designed for Home & Commercial Audio Distribution Systems

2-Channel Power Amplifier

- » Speaker A/B switching
- » Front panel balance & volume controls



UI-AMP100VS

Amplifiers

AudioSource

2-Channel Digital Amplifier

- » Main/Interrupt priority input switching
- » Speaker A/B switching



UI-AD1002 (50W)

UI-AD2002 (100W)

UI-AD3002 (150W)

SONOS

Play & Control Music with Your Voice

Sonos One with Amazon Alexa

- » Rich, room-filling sound with future ready voice control



Control Sonos Instantly xPress Audio Keypad for Sonos

- » Wi-Fi® enabled, battery-powered & decora-sized



4S-ONEG1US1B

DN-70800

Wireless Audio



CENTRAL VAC

Honeywell

THE POWER OF CONNECTED

Picks Up Dust & Dirt Turbocat Kit & Attachments

- » Turbocat zoom brush
- » 30' On/Off low volt hose
- » Standard attachments



4B-H060USA

Central Vac

Honeywell

THE POWER OF CONNECTED

Removes Dust & Allergens from the Home

H503 Power Unit

- » Cleans homes up to 3,500 sq. ft.
- » Permanent self-cleaning filter
- » 5 year warranty



4B-H503

Electrolux

Lightweight Cleaning & Easy to Use

30' Cleaning Kit

- » 3 level height adjustment
- » 30' hose with convertible cuff
- » 3-in-1 tool



4E-CS3000A

Racks & Accessories



Blank Panels, Rackscrews or 42RU Configured Rack

NO-EB1 & NO-EB2

- » Blank panel, steel, flanged
- » Black powder coat finish

NO-HP

- » 3/4" long standard black matte rack screws, 10-32, truss head
- » Pre-installed washers & self-guiding pilot points

NO-RCS4224

- » Glass front door, locking rear access panel
- » Ships fully assembled
- » 9 shelves, 9 blank panels & DC fans



NO-EB1 (1 RU)



NO-EB2 (2 RU)



NO-HP (100-Pc. Rackscrews)

NO-RCS4224 (Rack)




AUDIO/VIDEO

SONY

Incredible Contrast, Breathtaking Pictures

65" or 75" LED 4K Ultra HD Smart TV (Android TV™)

- » High dynamic range (HDR)
- » 4K HDR processor X1™
- » X-tended dynamic range™ PRO

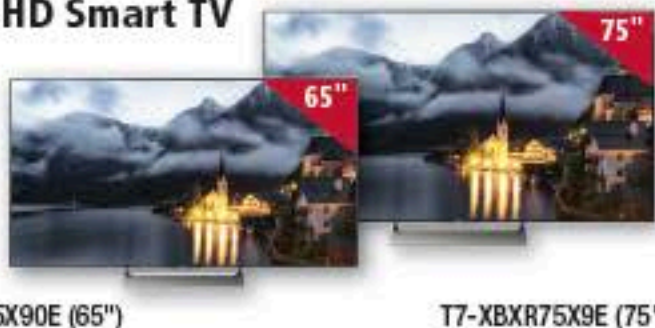

T7-XBR65X90E (65")

T7-XBR75X9E (75")

Flat Panel TVs

Flat Panel Pricing May Be Lower; Call Your Local ADI Branch

PHILIPS

48" Signage Display or 55" Video Wall Display

- PD-BDL4830QL
- » Save & play content with internal memory
- » USB playback
- » Manage & control your network remotely via SmartControl
- PD-BDL5588XC
- » 500 nits brightness; Tiling/Loop through
- » Designed for 24/7 operation



PD-BDL4830QL (48")

PD-BDL5588XC (55")

SHARP

Perfect for Businesses that Need to Grab Attention for Increased Engagement

80" or 90" Commercial LCD Display

- » RS-232C control capability
- » Built-in 10W per channel stereo audio system
- » 3 year limited warranty



1S-PNLE801 (80")



1S-PNLE901 (90")

peerless-AV®

Low-Profile Design

Universal Flat Wall Mount for 39" to 75" Displays

- » Holds display 1.2" from wall
- » Up to 0.25" (6mm) of vertical adjustment



QP-SF650P

Mounts

OMNI MOUNT™

Lift n' Lock™ for Easy 3-Step Installation

Full Motion Mount for 42" to 70" Displays

- » Low-profile design nests TV close to the wall
- » Tilts to reduce screen glare



30-OS120FM

ONKYO

Stereo Receiver with Built-In Bluetooth®

- » 45W/Ch (8 ohms, 20 Hz - 20 kHz, 0.08%, 2 Ch, FTC)
- » Built-in bluetooth® version 4.1 (A2DP/AVRCP)
- » Bluetooth® standby & auto connect functions



OC-TX8220

A/V Receivers

ONKYO

Ready for Chromecast® Built-In & DTS Play-Fi®

7.2-Channel Network A/V Receiver

- » 5.2.2-channel Dolby Atmos® & DTS:X®
- » 210W/Ch (6 ohms), 100 W/Ch (8 ohms)
- » HDR10 & dolby vision compatible



OC-TXNR676

YAMAHA

Add Audio In up to 9 Additional Rooms with MusicCast

7.2-Channel AVENTAGE Network A/V Receiver

- » Dolby Atmos® & DTS:X™ (5.1.2-ch)
- » 9 speaker terminals with intelligent amp assign for zone 2
- » 6-in, 1-out HDMI®



YM-RXA770BL

Subwoofers

PROFICIENT 10" or 12" Dual-Drive Floor Standing Sub

- » (2) poly-coated composite woofers
- C1-FS10
- » 250W RMS; 500W peak
- » 103 dB SPL
- C1-FS12
- » 300W RMS; 600W peak
- » 106 dB SPL



C1-FS10

C1-FS12

4K HDMI® Distribution

VANCO

Transmits Audio & Video from a Single Source to 2 HDMI® Outputs

4K HDMI® 1 x 2 Splitter

- » Supports video formats up to 4K2K @ 60 Hz with 12 bit YCBCR 4:4:4 & HDR



ZX-EVSP4K12

VANCO

Connects Uncompressed Full HD Digital A/V through a Single Cat 5e/Cat 6 Cable

HDBaseT™ Extender

- » Power over Cable (PoC) technology
- » Extends 1080p resolutions up to 230 ft. (70m)



ZX-EVEXHDB1

logitech®

Advanced Home Control for Entertainment & Smart Devices

Harmony® Elite

- » Combine up to 15 remotes & countless apps into one remote
- » Works with over 270,000 entertainment & smart home devices
- » Unlimited Harmony activities



3H-915000256

Control

LUTRON.

Allows for Setup, Control, & Monitoring of Multiple Devices

RA2 Select Main Repeater

- » App-based setup, control, & monitoring
- » Scalable up to 100 devices



L1-RRSEL2BL

Coax Cable


Honeywell

THE POWER OF CONNECTED

Performance of Copper Covered Steel Conductors

RG6 QUAD Shielded Broadband CCTV Coax Cable

- » (2) 100% AL foil aluminum & braids
- » General purpose/CL2 rated
- » 500' pull box
- » Color: white

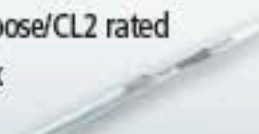

WG-50075501



WIRE & CABLE



9" Residential Enclosure Combo

- » Built with high quality lightweight plastic
- » Lockable door plus knockouts for cable & AC box
- » Can be mounted on wall or between 16" studs

H2-RESDC9PD

- » 8-port phone & 6-port 2 GHz video

H2-RESDC9PK

- » 8-port phone, 8-port Cat 6 data & 6-port 2 GHz video



H2-RESDC9PD



H2-RESDC9PK

Enclosures



28" Structured Media® Enclosure with Flush Mount Cover

- » Steel material; 18-gauge; powder-coated
- » Ideal solution to organize phone, TV, multi-room audio & high speed data networks for a 3 - 5 bedroom house
- » 28" H x 14.38" W x 3" D
- » Color: white



LV-4760528W



Modules

Streams Video, Audio & Data via HDMI® Cable HDMI® Female-to-Female Module

- » Snaps easily into ICC faceplates & inserts
- » Supports v1.4a with a distance of up to 30 ft.
- » Professional install with in-wall wiring



H2-107HDMWH



Fits Standard Single-Gang Outlet Box

Flush Mount Faceplate

- » Rugged & durable construction
- » Supports voice/data/video & others
- » UL Listed



H2-107F2CWH

Structured Cabling

25-PACK!



Gigabit Cat 5e UTP Quickport® Connector

- » Use with any Cat 5e UTP structured cabling application
- » One piece narrow design that supports high port density
- » Ideal for use in residential, MDU & high megabit applications



LV-5G108BW5

25-PACK!

Patch Cables



Prevents Cable Snags During Installation

Cat 5e or Cat 6 Patch Cables

- » Molded, snagless boots
- » 100% copper; 24 AWG
- » 8P/8C 50 micron gold-plated connectors
- » PVC cable jacket



Part #	Description
OE-C6BL10	10' Cat 6 Cable, 550 MHz, Blue
OE-C6BL14	14' Cat 6 Cable, 550 MHz, Blue
OE-C6BL25	25' Cat 6 Cable, 550 MHz, Blue
OE-C6BL50	50' Cat 6 Cable, 550 MHz, Blue
OE-C6GY10	10' Cat 6 Cable, 550 MHz, Grey
OE-C6GY14	14' Cat 6 Cable, 550 MHz, Grey
OE-C6GY25	25' Cat 6 Cable, 550 MHz, Grey
OE-C6GY50	50' Cat 6 Cable, 550 MHz, Grey

NEW Longer Lengths!

Brackets



For Space Restricted Areas 1 or 2U Wall Mount Hinged Bracket

- » 6" deep with hinge for easy & quick rear access
- » Steel construction for strength & durability
- » Large rear opening with cable anchor points



H2-CMSHB1RS (1U)



H2-CMSHB2RS (2U)



Protects against Spikes, Surges & Brownouts

EnSpire® Standby UPS

- » 350VA/200W
- » (4) fully protected
- » (4) surge only outlets
- » Auto-restart



R1-EN350

UPS



825VA/480W Battery Backup Standby UPS

- » 120V nominal voltage
- » 12 outlets
- » 1,030 joules of surge protection

Connected Equipment Warranty

\$200,000



OE-825V12VRD

Surge Protection

2-PACK!



Great Value!

241J Surge Protector

- » 6-outlet surge strip
- » 3 ft. SJT 14-gauge power cord
- » 3-prong ground



OE-6SURGE2P



1500VA/900W Line Interactive UPS

- » 120V nominal voltage
- » Automatic voltage regulation (AVR)
- » 8 outlets
- » 1500 joules of surge protection

Connected Equipment Warranty

\$500,000



OE-1500V8VRD



Voltage Regulation from Spikes & Surges

1000VA/700W PRO-RT Line Interactive UPS

- » 1000VA/700W
- » LCD display – shows UPS operating status
- » 6 fully protected/ 2 surge only outlets



R1-PRO1000RT



Wall Mountable Surge Protector

- » (6) 180° rotating outlets & (2) fixed outlets
- » 7' power cord
- » 2160 joules



R1-MMS780R



DYMO

XTL

Quick & Easy Labels
Help Organize Installations

Qualify for a **FREE XTL™**
Printer or Printer Kit!
Buy 10, 20 or 30 Tapes

Purchase 10 Tapes,
Get the XTL 300
Printer **FREE!**

Free Part # 7D-1868813F

Purchase 20 Tapes,
Get the XTL 300
Printer Kit **FREE!**

Free Part # 7D-1868814F

SAVE
up to
\$

Purchase 30 Tapes,
Get the XTL 500
Printer Kit **FREE!**

Free Part # 7D-1868815F

Printers



FREE!

FREE!

FREE!

BES

Cuts through Wood, Metal, Nails & Screws

3/8" x 18" Bellhangers Bit

» 118° tip for fast cutting



2E-BELL3818

Drill Bits

BES

3/8" x 5" Jobber Bits

» High performance
» Sold in six pack



2E-HSS386

6-PACK!

WBOX
TECHNOLOGIES

8 or 12" Nylon Wire Ties

» 50 lb. tensile strength
» UV rated (black only)



OE-WT8N
(8" Natural, 100-Pack)



OE-WT8B
(8" Black, 100-Pack)

OE-WT12N
(12" Natural, 100-Pack)

OE-WT12NB
(12" Black, 500-Pack)

Wire Ties

100- or 500-PACKS!

Connectors

10-PACK!

WBOX
TECHNOLOGIES

Compatible with
Honeywell 6508 Series Cable

BNC Plug Compression Connector

» 75 ohm
» RG 59 20 AWG PVC
» Universal compression connector



OE-BNCC0MH75



Includes the Most Common
Security Bits!

**15-in-1 Tamper Proof
Screwdriver**

» Palm saving rotating cap
» Retractive bit storage
» Spring-loaded ball bearing bits



LH-D151TP

PLATINUM
TOOLS

Provides Precise & Reliable
Terminations Every Time

**PRO-Strike Punchdown Tool,
with NEVERDull™ 110/66 Style
Combo Blade - Clamshell**

» Bayonet style (twist & lock)
blade retention socket
» Additional blade
styles available
» Precision controlled
impact force setting



TS-13159C
(Punchdown Tool with Blade)

TS-13031C (Blade)

Installation Tools

IDEAL

**Cat 5e or 6 Feed-Thru RJ-45
Modular Plugs or FT-45™
Plug Crimp Tool**

IL-85372 & IL-85377

» Verify conductor order
before crimping
» Eliminates wasted time
» Card of 100 plugs
IL-30495
» Crimps & trims flush
in one step
» Compact 5-1/2" design
» Custom blade over 2,000 cuts



IL-85372 (Cat 5e)

IL-85377 (Cat 6)



IL-30495 (Crimping Tool)

Accessory

5-PACK!

WBOX
TECHNOLOGIES

**3/4" x 66'
Electrical Tape**

» 7 mil; Flame retardant
» Cold/sunlight resistant
» Weather-resistant
» 5-pack



OE-17005WH

PLATINUM
TOOLS

**Rugged Cable Tester
& Tone Generator in One Unit
LANseeker™ Cable Tester**

» Displays cable test results on main
& remote units in less than 2 seconds
» Immediately detects shorts
by just plugging in one end
of a cable to the tester
» Identifies shorts, opens,
miswires, reversed
& split pairs



TS-TP500C

Test Equipment

ACT

**Simulates 20 Hour
Discharge Test in Seconds**

**6V/12V Intelligent
Battery Tester**

» Displays DC voltage & Ah capacity
» For 6V/12V SLA, gel & flooded
batteries
» New robust design with enhanced
accuracy



B6-ACT612

TRIPLETT

**CamView™
IP Pro+ or IP Pro-C**

» DHCP server allows you to
configure IP cameras
without a network
» Tests network, Ethernet cables,
PTZ, etc.
IU-8071
» Test IP, AHD & HD-TVI
cameras
IU-8072
» Test IP, NTSC/PAL
& HD-CVI cameras



IU-8071

IU-8072

IU-8071 (IP Pro+)
IU-8072 (IP Pro-C)

**WHILE
SUPPLIES LAST!**

February SAVINGS

2 WEEKS ONLY COVER DEALS! FEBRUARY 1-14, 2018!

Honeywell

THE POWER OF CONNECTED

Up to 5MP Resolution

Performance Series

8-Channel, 8 PoE NVR with 2TB HDD

» HDMI/VGA simultaneous video output

» 8 ports of PoE

HEN08122



2 WEEKS ONLY

SONY

65" 4K Ultra HD Smart TV

» High Dynamic Range (HDR)

» 4K HDR Processor X1™

» X-tended Dynamic Range™ PRO

T7-XBR65X90E



2 WEEKS ONLY

Prices subject to change from Sony.

OMNI MOUNT

TV Wall Mount fits 37" - 80" Displays

» Lift n' Lock™ for easy 3-step installation

» Pans & swivels to achieve desired position; Tilts to reduce glare

» Includes universal adapter for greater VESA compatibility

30-OC125FM



Special discounts may not apply to select accounts. Prices may not be combined with any coupon or other offer. Not responsible for typographical errors. Savings shown represent discount savings from one lot pricing. Prices not applicable to purchases made before sale date. Prices valid in the United States only. Sony Flat Panel TVs not available to the Hawaii location. SALES FLYER EXPIRES 2/28/18.

ADI Global Distribution

263 Old Country Road
Melville, NY 11747



February 27 |
Oklahoma City, OK

Presorted
First-Class Mail
US Postage Paid
Permit No. 90
Burlington, WI

GO TO ADIGLOBAL.COM/US

For orders, call 1.800.233.6261

For Systems Sales & Support, call 1.800.234.7971



BOSCH

Ceiling Mount
Panoramic PIR Detector

» Motion Analyzer II Processing

» Mountable 8 - 18'/60' detectable pattern

» 60' x 360° coverage

DS-DS938Z

2 WEEKS ONLY

BRK

110V Smoke Alarm
with 10 Year Locked Battery

» Locked battery drawer

» Interconnects with all other 110 volt BRK alarms

BR-9120LBL



2 WEEKS ONLY



DW DIGITAL WATCHDOG
Complete Surveillance Solutions

Ask about FREE License Promo!

2.1MP IR Outdoor Dome Camera

» 4mm lens, True Day/Night; Digital Noise Reduction

» Smart IR range to 50'; IP67 rated; 12V/PoE

6K-MV7214V

2 WEEKS ONLY



0E-13DF28
(Dome, 2.8mm lens)

0E-13BF40
(Bullet, 4mm lens)

1.3MP Outdoor IR
Dome or Bullet Camera

» True Day/Night; 3D Digital Noise Reduction

» Digital Wide Dynamic Range; IR range to 100'

» IP66 & IK10 rated; 12V/PoE

2 WEEKS ONLY



GN-GES324WR (Red Strobe)
GN-GES324WW (White Strobe)

GN-GEC324WR (Red Horn/Strobe)
GN-GEC324WW (White Horn/Strobe)

GENTEX CORPORATION

Commander3 Wall Mount
Strobe or Horn/Strobe

» 24VDC with selectable candela options of: 15, 30, 60, 75 & 110

» Features metal die-cast mounting bracket

» Includes SuperSlide & Checkmate

2 WEEKS ONLY



MINUTEMAN
POWER TECHNOLOGIES

EnSpire® Series Standby UPS

» 550VA/300W; (4) battery & (4) surge only outlets

» Auto-restart feature

R1-EN550

2 WEEKS ONLY

*The offer is limited to the month in which this flyer is mailed by ADI and is valid for non special order in stock products. The item must be of the same brand, model and quantity and located in the United States and is subject to verification. The comparable item must be new and factory sealed and subject to a manufacturer's warranty applicable in the United States. Competitors' prices must be in US dollars and will be adjusted for any fees, taxes or other charges such as environmental handling fees and shipping. The offer does not apply to advertising errors or misprints, restricted or dealer program offers, rebates, coupons, premiums, free or bonus offers, clear-out pricing, limited or minimum quantity or limited time offers, add-on related services such as extended service plans, delivery, installation, maintenance agreements, special credit or financing offers. We reserve the right to exclude significantly below cost competition loss leader pricing. The terms and conditions of the offer are subject to change without notice.

SALE PERIOD: February 1-28, 2018 | **MORE SAVINGS at ADIGLOBAL.COM/SAVE** | CALL 1.800.233.6261